

# Refrigerator SEAL

## **Features**

- Odourless, Antifungal and Nontoxic Material
- Hardness Range from 60 to 70 Shore A
- Available in wide variety
  of colors and sizes as per
  customer requirements
- We can supply in required running lengths and 4 sided welded frames

## **Available Colors**

- Black
- Light gray
- William gray











MATERIALS SPECIFICATION		
PROPERTIES	SPECIFICATION	
Materials	Rubberized PVC	
Hardness	65±3 Shore A (On product)	
Tensile Strength	Min 100 Kgf/cm <sup>2</sup>	
Elongation at Break	Min 350%	
FDA	Compliance	
ROHS	Compliance	
REACH	Compliance	
EN-71	Compliance	

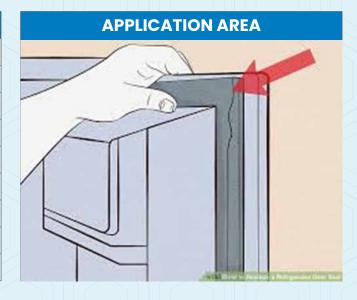

MAGNETIC STRIP TECHNICAL INDICATORS			
ITEM	TECHNICAL INDICATORS		
Maximum magnetic strength	90 to 100kg/ 25mm at 0.5 mm air gap		
Surface magnetic flux density	700 Gauss		
3 pole magnetization	N-S-N		
Material	Isotropic		
Tensile strength	>4MPa		
Elongation at break	>10%		
Hardness	>98HS (A)		
Proportion	3.6±0.2g/cm <sup>3</sup>		
Deflex on property	Free of cracks		
Torsion performance	Free of cracks		
Sorption weight	SC2x9	>29 g/cm <sup>3</sup>	
	SC2.5x9	>32 g/cm <sup>3</sup>	
	Other Specifications available now	>33 g/cm <sup>3</sup>	
	Tensile-strength is not less than orig	jinal 90%	
High-heat aging performance	Elongation at break is not less than original 80%		
	Hardness is not more than original 105%		

We offer custom development of door seals and gaskets for refrigerators, coolers and freezers including magnetic versions. Our solutions include Magnets, molded /Heat jointed gaskets, 3 colors option & customer packaging. Contact us for your specific needs and configurations.

### **PART DETAILS**







09TP444



09TP497



09TP498



09TP499



09TP500





09TP502



09TP631



**09TP632** 



**09TP633** 



Manufactured and Marketed by:

#### **ALP OVERSEAS PVT. LTD.**

Corporate Office: Plot No. 32, Sector-18 HUDA, Gurgaon, Haryana - 122015 (INDIA) ★ +91-9810354954 
 ▼ vinay@alpoverseas.com 
 ● www.alpoverseas.com